


CATALOGUE



The Lighting Company
The Future Company
www.dgr.com.my

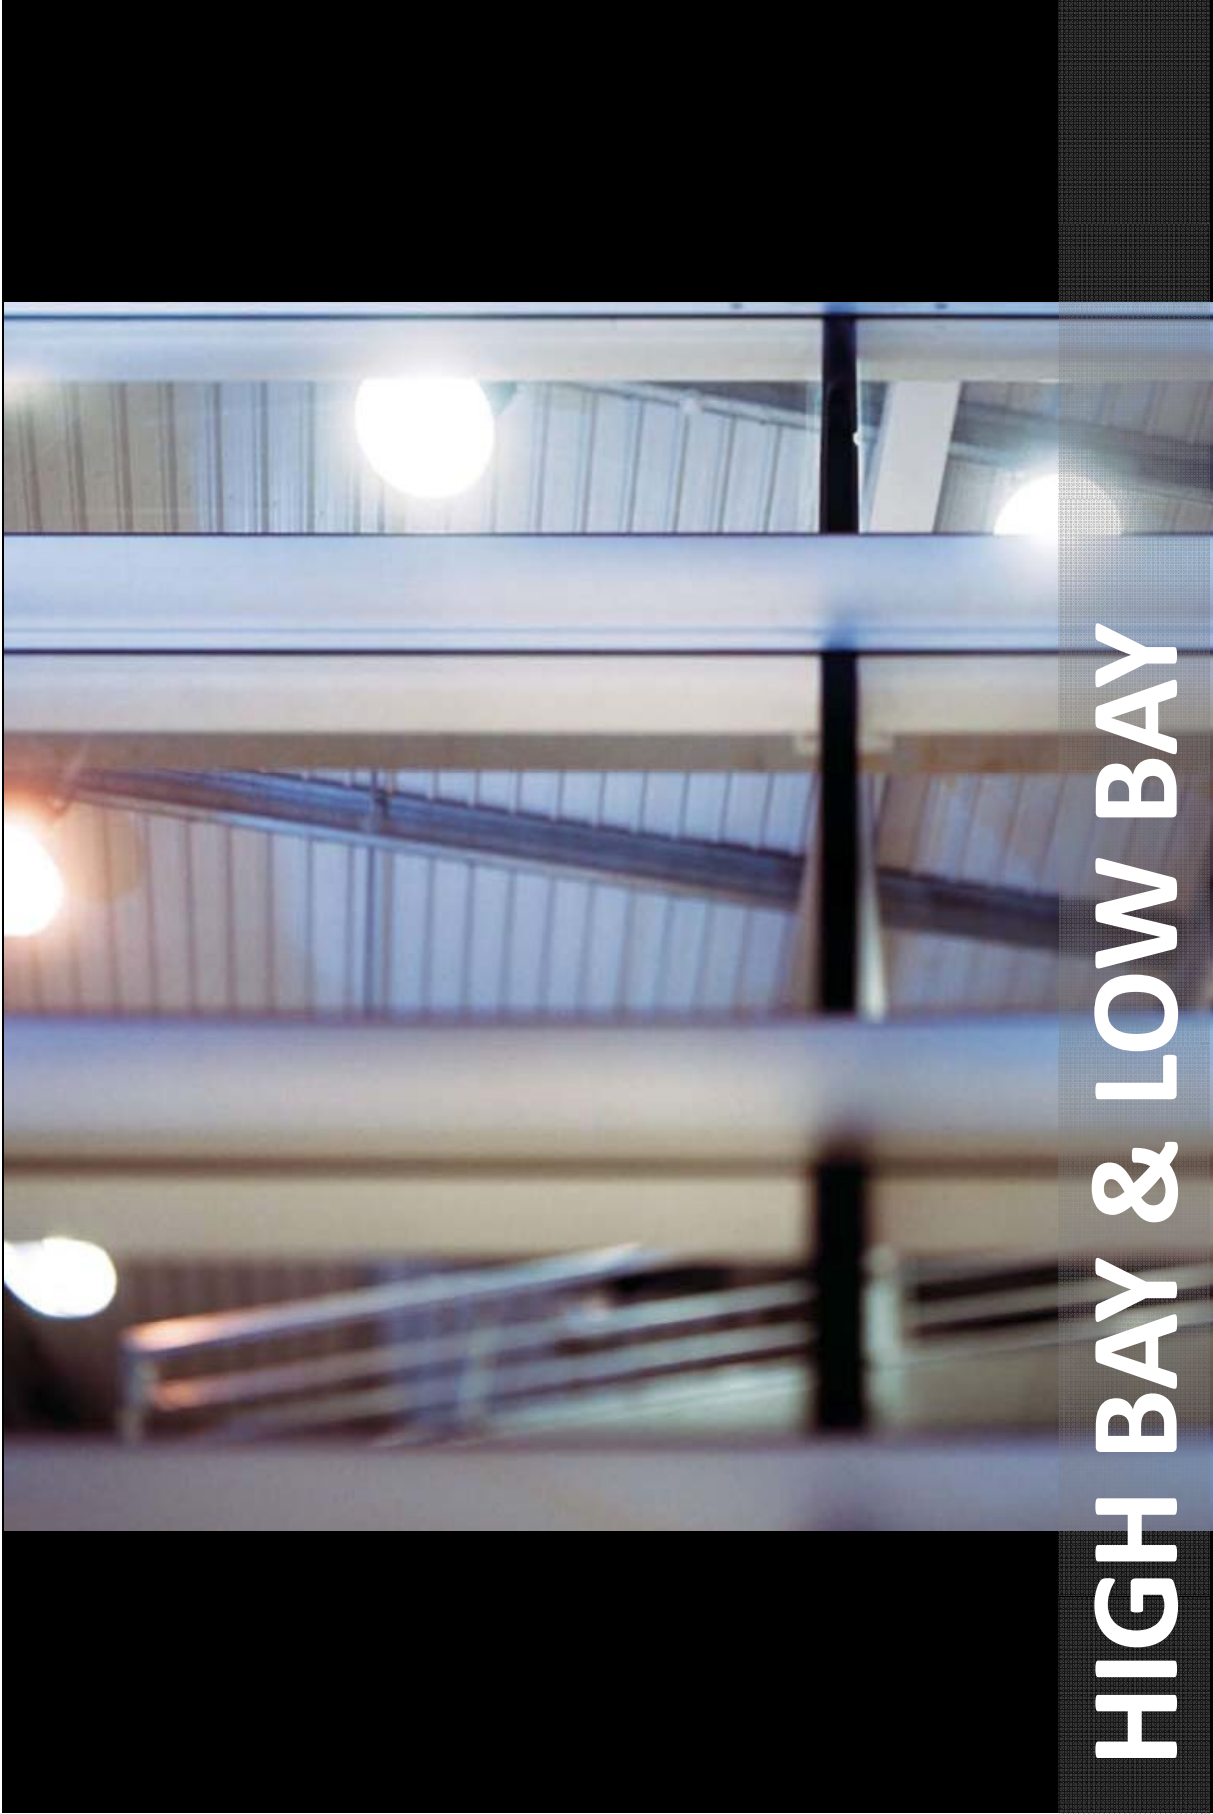

HIGH BAY & LOW BAY

LED HIGH BAY LIGHTING



The Lighting Company

LED HIGH BAY LIGHTING HB 01


SPECIFICATION

Rate Voltage: AC 110-265V / 50H~ 60Hz
System Power Factor: > 0.92
Beam angle: 60° - 120°
Light efficiency: > 100lm/W
Fixture efficiency: > 90%
CRI: >75
IP grade: IP 65
Standard complied: EMC, LVD, Rohs Complied
Operation Temperature: -40° ~ 60°



MODEL	POWER (W)	VOLTAGE (V)	Flux (lm)	Optimal/ acceptable Distance(M)	CCT (K)	DIMENSION Ø x H (mm)
LEO-MSF-40W	45W	100~265	>4000	3 / 5~6	3000 ~6000	Ø220*180
LEO-MSF-80W	90W	100~265	>8000	7 / 8~9	3000 ~6000	Ø300*180
LEO-MSF-120W	132W	100~265	>12000	10 / 10~12	3000 ~6000	Ø300*210
LEO-MSF-150W	165W	100~265	>15000	12 / 12~15	3000 ~6000	Ø360*225
LEO-MSF-200W	220W	85~265	>20000	15 / 15-20	3000 ~6000	Ø360*225

PHOTOMETRIC DATA

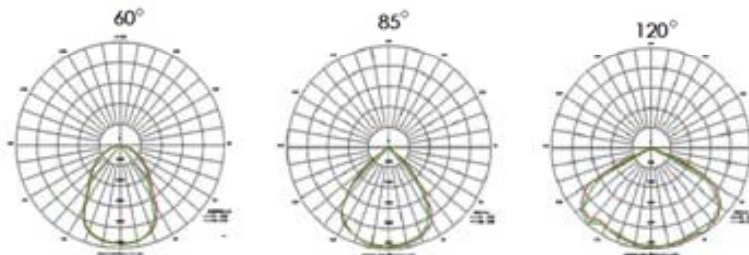

Note:

Testing environment temperature: 25±2°C.

The above parameters are typical data; the actual parameters of each single product could differ from the typical data.

The data are subject to change without prior notice.

DML GLOBAL RESOURCES SDN BHD (875817-D)

NO.43, JALAN BP 6/2, BANDAR BUKIT PUCHONG, 47100 PUCHONG, SELANGOR DARUL EHSAN, MALAYSIA.

TEL : 011 1533 2886 FAX: +603 8051 3783 WEBSITE: www.dgr.com.my

Email: sales@dgr.com.my