

# CATALOGUE



The Lighting Company  
The Future Company  
[www.dgr.com.my](http://www.dgr.com.my)



**BATTEN LIGHT**

# BATTEN

## SUSPENDED PENDANT SURFACE/MOUNT LED BATTEN



The Lighting Company

### SPECIFICATION

**Beam angle:** 110°  
**Degree power:** 10W (2Feet) / 18W (4Feet)  
**Efficacy:** 100lm/w  
**CCT:** 3000K / 4000K  
**CRI:** >80 Ra  
**Lifespan (Ta @ 25 Celcius):** 50,000 Hours  
**Input Voltage:** 220-240 V  
**Main Frequency:** 50-60 Hz  
**Power Factor:** 0.9  
**Body Material:** Aluminium and PC  
**IP Rating:** IP 20  
**Accessories:** Connector, Suspended cable  
**Model No:** LDTH Bat Eas 2ft LB02E ( 2 Feet )  
LDTH Bat Eas 4ft LB04E ( 4 Feet )



### DIMENSION , mm

#### 2 Feet


Length: 600mm  
Width: 25mm  
Height: 44mm

#### 4 Feet

Length: 1180 mm  
Width: 25mm  
Height: 44mm



### PHOTOMETRIC DATA

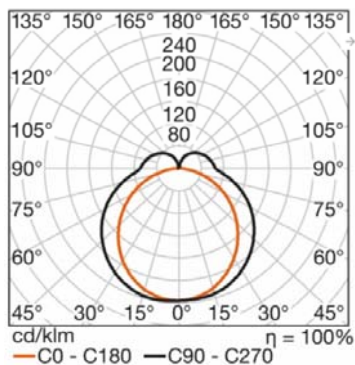

Note:  
Testing environment temperature: 25 ± 2°C.  
The above parameters are typical data; the actual parameters of each single product could differ from the typical data.  
The data are subject to change without prior notice.

DML GLOBAL RESOURCES SDN BHD (875817-D)

NO.43, JALAN BP 6/2, BANDAR BUKIT PUCHONG, 47100 PUCHONG, SELANGOR DARUL EHSAN, MALAYSIA.

TEL : 011 1533 2886 FAX: +603 8051 3783 WEBSITE: [www.dgr.com.my](http://www.dgr.com.my)

Email: [sales@dgr.com.my](mailto:sales@dgr.com.my)

# BATTEN

## SUSPENDED PENDANT SURFACE/MOUNT LED BATTEN (ASYMETRICAL WALL WASHER)



The Lighting Company

### SPECIFICATION

**Beam angle :** Asymetrical  
**Power:** 15W(2Feet) / 29W( 4Feet)  
**Efficacy:** 80lm/W  
**CCT:** 2,700K / 3,000K  
**CRI:** >80 Ra  
**Lifetime (Ta @ 25 Celcius):** 40,000 hours  
**Input Voltage:** 220 -240 VAC  
**Mains Frequency:** 50-60 Hz  
**Dimming:** Yes  
**Body Material:** Aluminium and PC  
**IP Rating:** IP20  
**Model No:** LDTH STRIP ASY 02S-W4F-830 (2 feet)  
LDTH STRIP ASY 04S-W4F-830 (4 feet)



### DIMENSION , mm

#### 2 Feet


600mm x 35mm x 65mm

#### 4 Feet

1200mm x 35mm x 65mm



### PHOTOMETRIC DATA

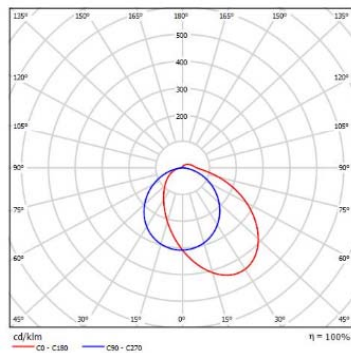

Note:  
Testing environment temperature: 25 ± 2°C.  
The above parameters are typical data; the actual parameters of each single product could differ from the typical data.  
The data are subject to change without prior notice.



**DML GLOBAL RESOURCES SDN BHD (875817-D)**

NO.43, JALAN BP 6/2, BANDAR BUKIT PUCHONG, 47100 PUCHONG, SELANGOR DARUL EHSAN, MALAYSIA.

TEL : 011 1533 2886 FAX: +603 8051 3783 WEBSITE: [www.dgr.com.my](http://www.dgr.com.my)

Email: [sales@dgr.com.my](mailto:sales@dgr.com.my)